

Surface Applied



The Most Innovative System



Introducing the **Ultimate Solution™** in Tactile Walking Surface Indicators (TWSI). Access® Tile Surface Applied has combined proven engineered polymers, processing and material technologies with innovative and intelligent design features to create the ultimate in tactile walking surface indicators. Maximized efficiencies in manufacturing, materials sourcing and product specifications deliver the most cost-effective solution in the industry. Access Tile® truncated dome and wayfinding bar tiles are the industry leader for durability, weather and wear resistance and are available as replaceable cast in place tiles and directional bars.

Tactile Walking Surface Indicators (TWSI) products for the following and many more applications:

- Curb Ramps
- Vehicular Passage Ways
- Parking Areas
- Top of Stair Landings – Wheelchair Ramps
- Pedestrian Crossings
- Escalator Approaches
- Transit Platforms
- Multi-Modal Transit Stations

COMPLIANCE

Kinesik Engineered Products Incorporated is in full compliance with Canadian Accessibility Codes. The full product range of Kinesik tactile walking surface indicators meet the most recent AODA, CSA, ISO, provincial and national building codes. Kinesik Engineered Products Incorporated is your one stop source for all tactile systems for internal and external applications. Only Kinesik provides a complete range of products designed for safety, convenience and code compliance.



PRODUCT FEATURES


- A cost effective method of retrofitting an existing curb ramp application
- A complete system is shipped with the tiles; adhesive & colour match fasteners
- Beveled edges make for a smooth transition that meets Canadian Accessibility Codes
- Available as a standard radius tile
- Easily cut to conform to various sizes and radius ramps
- Available in eight (8) different sizes to meet your needs
- Comes in six (6) standard colours with Federal colour identification numbers
- Light weight and easy to handle
- 5 year manufacturer's warranty

**ACCESS TILE
RADIUS CALCULATOR**

Radius Calculator is found on the Kinesik.ca Resources Page



Tactile Walking Surface Indicator (TWSI) with Truncated Domes

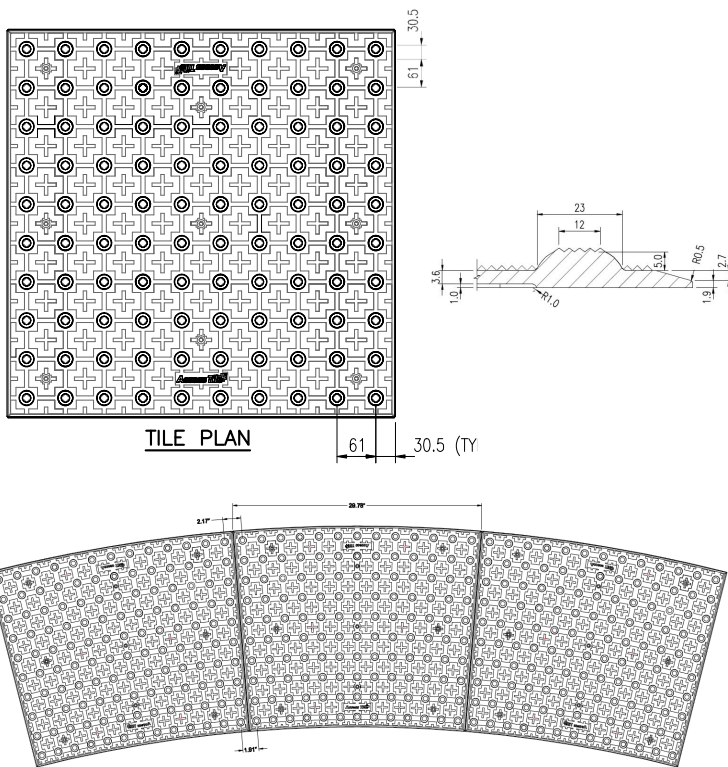


PROFESSIONAL ASSOCIATIONS

Kinesik is proud to be a member of the following organisations



STANDARD COLOURS

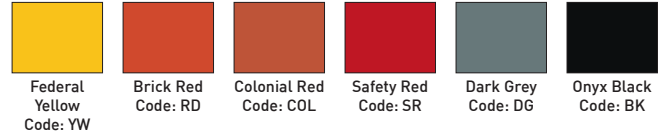

Custom colours available. Let us know how we can help.

TILE SPECIFICATIONS

Test	Description	Requirements
AASHTO HS20-44	Wheel Load Tests	4,722 kg
ASTM D 695	Compressive Strength	≥ 172 MPa
ASTM D 790	Flexural Strength	≥ 207 MPa
ASTM D 638	Tensile Strength	≥ 86 MPa
ASTM D 696	Coefficient of Thermal Expansion	2.32 x 10 ⁻⁵ /°C
ASTM C 1028	Static Coefficient of Friction	≥ 0.8 wet/dry
ASTM E 84	Flame Spread Index	≤ 25
ASTM D 570	Water Absorption	≤ 0.05%
ASTM C 501	Abrasive Wear Index Iw	> 500
ASTM G 155	Accelerated Weathering (2000 hrs)	ΔE < 5
ASTM C 1026	Freeze/thaw	No effect
ASTM B 117	Salt Spray (300 hrs)	No effect
ASTM D 1037	Accelerated Aging Cycle Testing	No effect
ASTM D 543	Chemical Resistance	No effect

APPLICATIONS

- TWSI – Truncated Domes**
 - Accessible curb ramps align with the safe pedestrian crossing route across the vehicle roadway.
 - An entry into a vehicular route or area where no curbs or other elements separate it from pedestrian route such as curb ramps, wheel chair ramps, top of stairs/escalators and blended transitions.
 - An unprotected drop off edge, such as a transit platform where the change in elevation is greater than 250mm or the slope is steeper than in a ratio of 1:3 (33%).
 - The unprotected edges of a reflecting pool.
- TWSI – Wayfinding Bars**
 - Located in large open floor areas, such as shopping malls or transportation terminals, to facilitate wayfinding by indicating the primary routes of travel.
 - The indicated routes should lead from the entrance to major destinations, such as an information kiosk, registration desk, stairway, elevator, escalators, or to store or service doors.

STANDARD SURFACE APPLIED SIZES

SIZE	PRODUCT CODE	SIZE	PRODUCT CODE
12" x 12" (305 x 305 mm)	ACC-S-1212	24" x 60" (610 x 1524 mm)	ACC-S-2460
12" x 48" (305 x 1220 mm)	ACC-S-1248	36" x 48" (915 x 1220 mm)	ACC-S-3648
24" x 24" (610 x 610 mm)	ACC-S-2424	36" x 60" (915 x 1524 mm)	ACC-S-3660
24" x 36" (610 x 915 mm)	ACC-S-2436	24" x 30" (610 x 762 mm)	ACC-S-2430CRV
24" x 48" (610 x 1220 mm)	ACC-S-2448		